


AIRVOLUTION/8

8 ft.1HP Fan
Model No. MA08XL1006

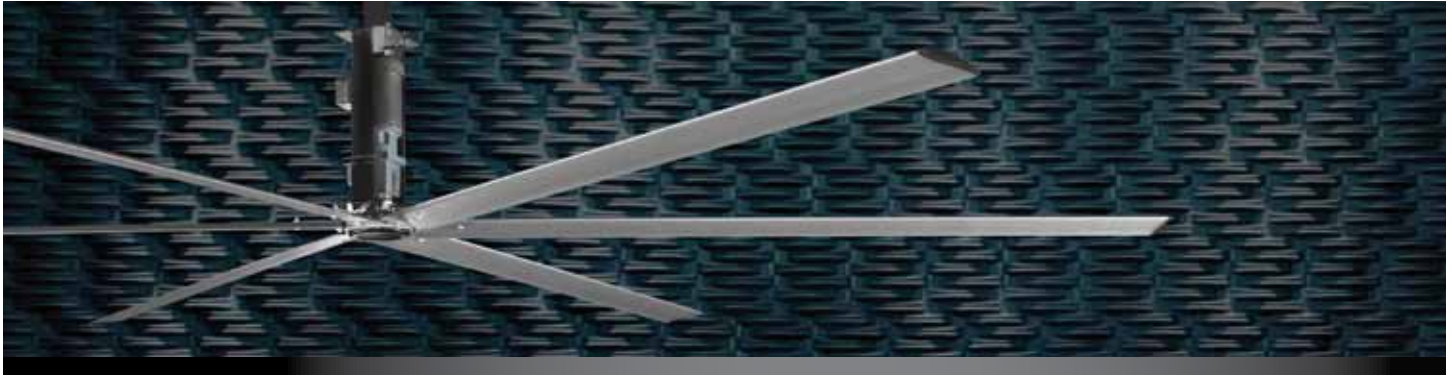

GENERAL

Model Number	MA08XL1006
Diameter	8 FT / 2.44 Meters
Blade Style	XL
Number of Blades	6
Nominal Horsepower	1.0 HP / 0.75 kW
Hanging Weight	160 lbs / 72.6 Kg
Shipping Weight (Including MCP, Mounting Hardware) (average)	315 lbs / 142.6 Kg
Power Unit Pallet Dimensions / Weight	26" X 30" X 33.5" / 246 lbs / 0.66 X 0.76X 0.85 Meters / 111.58 Kg
Blade Pallet Dimensions/Weight	72" X 25" X 15" / 101 lbs 1.8 X .63 X .38 Meters / 46 Kg

PERFORMANCE (AT MAX SPEED)

Thrust	17.8 lbf
Displacement (fwd, blowing down)	53,623 CFM / 25.3 CMS
Displacement (rev, blowing up)	37,585 CFM / 979.3 CMS
Maximum Speed	206 RPM
Power Usage @ Max. Speed	265 kW
Efficiency @ 100% Max. Speed	148.68 CFM/Watt / 4.21 CMS/Watt
Maximum Effective Area	4,000 SQ FT / 371.6 m ²
Typical Industrial Spacing	55 FT / 16.76 Meters
Typical Dairy Spacing	50 FT / 15.24 Meters

MOUNTING HARDWARE

Standard Mount	Universal I-Beam Clamp w/ Swivel Joint and a 7.5" Drop
Glulam Mount (Optional)	Brackets w/ Swivel Joint & 7.5" Drop
Extra Wide / Thick I-Beam Mount (Optional)	Upon Request
Additional Drop Extensions (Optional)	Up to 10 FT in 1 FT Increments

MOTOR

Power	1.0 HP / 0.75 kW
Ambient Operating Temperature	40C°
Insulation Class	F
Service Factor	1.15

GEARBOX

Type	2-Stage Helical
Service Interval	Lubed For Life

MOTOR CONTROL PANEL (MCP)

Standard Power and Max Amp Draw	120V, 208-240V 1Ø (11.6A), 208-240V 3Ø (6.7A), 460-480V 3Ø (3.5A)
Enclosure	NEMA 1
Disconnect Switch	20-25 Amp, Lockable
Remote Control Wall Mounted Switch NEMA 4X	Fwd/Off/Rev w/Speed Control Knob
RF Line Filter	Built In VFD
VFD Motor Drive Cable	25 Feet / 7.62 Meters
Remote Cable	100 Feet / 30.48 Meters
Options	NEMA 4/ 4x Enclosure, 50hz Operation, Line Reactor
Special Wiring (Variable Speed Model Only)	Thermostats, fire alarm interface, VESDA, networking etc. (Consult Factory)

SAFETY COMPONENTS

Blade Retainer Links (6), Safety Cable, Guy Wires (Ceiling mount only), Patented Inter-Locking Hub

WARRANTY

12 YRS* on Motor, Gearbox & Control Panel.
Limited Lifetime on Blades, Hub & Mounting System.

*dB Values Were Obtained by Testing. Specific Applications/Installation values may vary.
*Labor Allowance to Remove and Replace in 1st Year
Contact MacroAir for full Warranty Details. Specifications are subject to change.



1150 Davis Road, Suite J, Elgin, IL 60123
P: (847) 468-8800 • (800) 788-8867 • F: (847) 468-8811
www.lt-equip.com • info@lt-equip.com

MacroAir
engineers of air™

Application Specific Equipment